



Engineered Solutions for leak-free Industrial Performance


COMFIT




Pipe Fittings




TUBE FITTING

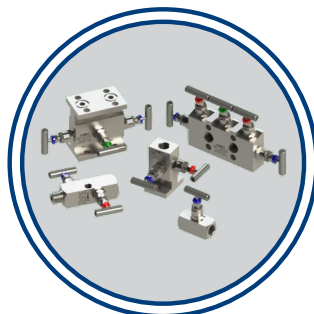


MANIFOLD VALVES

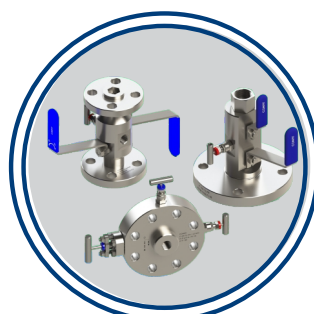


DBB VALVES




PRE-FAB HOOK UP




SCREWED NIPPLE



ADAPTERS




HEX NIPPLE



MALE HEX CLUB



FEMALE ELBOW



MALE ELBOW

- o Available in 1/16" to 2"
- o Material - SS 316, Carbon Steel, Brass
- o Thread - NPT, ISO/BSP, SAE




.....**CONTENTS**

Contents for Pipe Fittingspg.2

Ordering Codes of Pipe Fittingspg. 3

Straight Fittings

Nipples



Hex Nipples-CPHN

- NPT(M) x NPT(M)..... pg. 4
- NPT(M) x ISOP(M)..... pg. 4


Hex Reducing Nipple - CPHRN

- NPT(M) x NPT(M)..... pg. 4

Hex Long Nipples - CPHLN

- NPT(M) x NPT(M)..... pg. 5

Adapters




Adapters-CPA

- NPT(M) x NPT(F)..... pg. 5
- NPT(F) x ISOP(M)..... pg. 5

Reducing Adapters - CPRA

- NPT(F) x NPT(M)..... pg. 5

Bushings



Reducing Bushings - CPRB

- NPT(M) x NPT(F)..... pg. 6

Couplings



Hex Couplings-CPHC

- NPT(F) x NPT(F)..... pg. 6
- Hex Reducing Couplings
- NPT(F) x NPT(F)..... pg. 6

90° Elbow fittings

Elbows



Female Elbow-CPFE

- NPT(F) x NPT(F)..... pg. 7

Street Elbow

- NPT(M) x NPT(F)..... pg.7

Reducing Street Elbow

- NPT(M) x NPT(F)..... pg. 7

Male Elbow

- NPT(M) x NPT(M)..... pg. 8

45° Elbow Fittings

45° Elbows



45° Female Elbow

- NPT(F) x NPT(F)..... pg. 8

45° Street Elbow

- NPT(M) x NPT(F)..... pg. 8

Tee Fittings

Tees



Female Tees

- NPT(F)..... pg. 8

Street Tees

- NPT(F) x NPT(M) x NPT(F)..... pg. 9

Branch Tees


- NPT(F) x NPT(F) x NPT(M).....pg. 9

Male Tees

- NPT(M) x NPT(M) x NPT(M)..... pg. 9

Cross Fittings

Female Cross




Female Cross

- NPT(F) x 4sides..... pg. 9

Accessories


Caps



Hex Female Pipe Cap

- NPT(F).....pg. 10

Plugs



Hex Male plug

- NPT(M)..... pg. 10

Hex Pipe Plug - RS

- ISOP (M)..... pg. 10


Gasket



- Gasket-RS..... pg. 11
- Gasket-RP..... pg. 11
- Gasket-RG..... pg. 11



ORDERING CODS OF PIPE FITTINGS

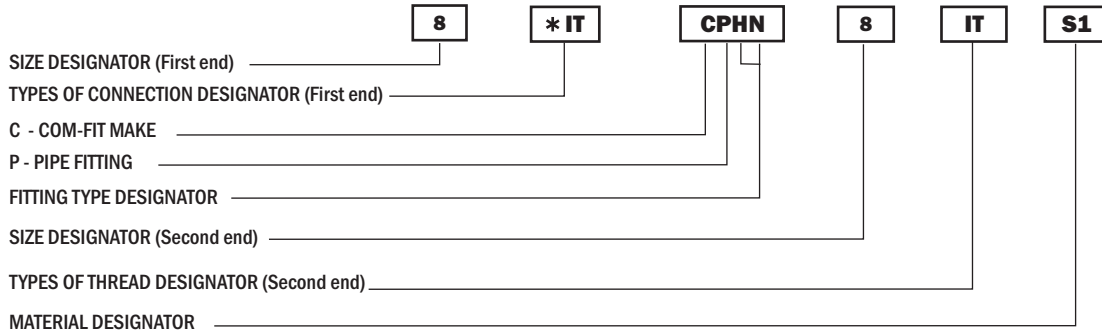

FITTING TYPE	DESIGNATOR
STRAIGHT FITTINGS	
- PIPE NIPPLE	PN
- HEX NIPPLE	HN
- HEX NIPPLE - RS	HN-RS
- HEX REDUCING NIPPLE	HRN
- HEX LONG NIPPLE	HLN
- ADAPTER	A
- ADAPTER - RS	ARS
- REDUCING ADAPTER.	RA
- SAE ADAPTER	SA
- GAUGE ADAPTER	GA
- REDUCING BUSHING	RB
- HEX COUPLING	HC
- HEX REDUCING COUPLING	HRC
- MALE CONNECTOR	MC
- FEMALE CONNECTOR	FC
- TUBE UNION	TU
- PIPE UNION	RU
90° ELBOW FITTINGS	
- FEMALE ELBOW	FE
- STREET ELBOW	SE
- REDUCING STREET ELBOW	RSE
- MALE ELBOW	ME
- FEMALE ELBOW	FE
- UNION ELBOW	UE
45° ELBOW FITTINGS	
- 45° FEMALE ELBOW	45FE
- 45° STREET ELBOW	45SE
TEE FITTINGS	
- FEMALE TEE	FT
- STREET TEE	ST
- BRANCH TEE	BT
- MALE TEE	MT
- UNION TEE	UT
CROSS FITTINGS	
- FEMALE CROSS	FC
- UNION CROSS	UC
ACCESSORIES	
- UNION BALL JOINT	UBJ
- HEX FEMALE PIPE CAP	HFPC
- HEX MALE PLUG	HMP
- ALLEN PLUG	AP
- HEX SAE PLUG	HSP
- ALLEN SAE PLUG	ASP
- GASKET - RS	RSG
- GASKET - RP	RPG
- GASKET - RG	RGG
- HEX PIPE PLUG	HPP
- HEX PIPE PLUG - RS	HPPRS

END CONNECTION	DESIGNATOR
- ODT	T
- NPT	N*
- BSP - TAPPERED	IT
- BSP - PARALLEL FOR RS GASKET	RS**
- BSP-PARALLEL FOR RP GASKET	RP**
- BSP-PARALLEL FOR RG GASKET	RG***
- FRACTIONAL STUBS
- MATRIC STUB	MS
- SAE / MS STRAIGHT	SM
- PIPE BUTT WELD	PB
- PIPE SOCKET WELD	PS
- PLAIN END	PE

N* : This designator is required only for Double Ferrule Fittings.
Leave blank for pipe fittings.



SIZE	DESIGNATOR
In Inch	
1/16"	1
1/8"	2
1/4"	4
3/8"	6
7/16"	7
1/2"	8
9/16"	9
5/8"	10
3/4"	12
1"	16
1-1/16"	17
1-1/4"	20
1-5/16"	21
1-1/2"	24
2"	32

MATERIAL	DESIGNATOR	MATERIAL	DESIGNATOR
STEEL	S	ALLOY 20	C20
SS 316	S1	ALLOY C-276	HC
SS 316L	S2	ALLOY 600	INC
SS 316/SS 316L	S1S2	ALLOY 825	INC1
SS 304	S3	ALLOY 625	INC2
SS 304L	S4	TITANIUM	TI
CARBON STEEL	S5	MONEL 400	M
P/F321	S6	DUPLEX-F60 / S32205	D
SS 347	S7	DUPLEX-F51 / S31803	D1
P/F 11	S8	DUPLEX-F53 / S32750	D3
P/F 22	S9	DUPLEX F55 / S32760	D5
P/F 5	S10	NACE MR-0175	NM
A105N	S11	NACE MR0103	Nm1
P/F 91	S12		
LF2	Lf2		
ALUMINIUM	AL		
BRASS	B		





Hex Nipple__NPT(M) x NPT(M)

PRODUCTION CODE	PIPE SIZE NPT (M) Inch. (ØN)	HEX. SIZE	LENGTH	WORKING PRESSURE (PSIG) STAINLESS STEEL
		MM (F)	MM (L)	
2-CPHN	1/8	11	24	10000
4-CPHN	1/4	14.28	34.4	8000
6-CPHN	3/8	17.26	34.4	7500
8-CPHN	1/2	22	45.2	8000
12-CPHN	3/4	27	46.2	7500
16-CPHN	1	36	58	5200



Hex Nipple_ (ISO BSPP(M))



PRODUCTION CODE	PIPE SIZE BSP (M) Inch. (ØN)	HEX. SIZE	LENGTH	WORKING PRESSURE (PSIG) STAINLESS STEEL
		MM (F)	MM (L)	
2RS-CPHN	1/8	14.28	25	4500
4RS-CPHN	1/4	19	30.5	4500
6RS-CPHN	3/8	22	32	4500
8RS-CPHN	1/2	27	38	3625
12RS-CPHN	3/4	36	40	3625
16RS-CPHN	1	41.3	52	3625



1) RS parallel threads are commonly used with flat RP gasket, please refer page no. 11


Hex Reducing Nipple__NPT(M) x NPT(M)

PRODUCTION CODE	PIPE SIZE NPT (M) Inch. (ØN)	PIPE SIZE NPT (M) Inch. N1	HEX. SIZE	LENGTH	WORKING PRESSURE(PSIG) STAINLESS STEEL
			MM (F)	MM (L)	
4-CPHRN-2	1/4	1/8	14.28	29.7	8000
6-CPHRN-2	3/8	1/8	17.46	29.7	7500
6-CPHRN-4		1/4	17.46	34.4	7500
8-CPHRN-2	1/2	1/8	22	35.6	8000
8-CPHRN-4		1/4	22	40.3	8000
8-CPHRN-6		3/8	22	40.3	7500
12-CPHRN-4	3/4	1/4	27	41.3	7500
12-CPHRN-6		3/8	27	41.3	7500
12-CPHRN-8		1/2	27	46.2	7500
16-CPHRN-4	1	1/4	36	48.2	5200
16-CPHRN-6		3/8	36	48.2	5200
16-CPHRN-8		1/2	36	53.1	5200
16-CPHRN-12		3/4	36	53.1	5200





Hex Long Nipple__NPT(M) x NPT(M)





To order, insert code as a prefix and the available length as a suffix to the basic ordering number.
Example :- 8-CPHLN-100L

PRODUCTION CODE	PIPE SIZE NPT (M) Inch.	HEX SIZE (MM)	LENGTH (MM)				WORKING PRESSURE (PSIG) STAINLESS STEEL
			(L)				
2-CPHLN-*	1/8	11	50	75	100	120	10000
4-CPHLN-*	1/4	14.28					8000
6-CPHLN-*	3/8	17.26					7500
8-CPHLN-*	1/2	22					8000
12-CPHLN-*	3/4	27	75	100	120	150	7500
16-CPHRN-*	1	36					5200

To order, insert code as a prefix and the available length as a suffix to the basic ordering number.
Example :- 8-CPHLN-4L



PRODUCTION CODE	PIPE SIZE NPT (M) Inch.	HEX SIZE (MM)	LENGTH (INCH)				WORKING PRESSURE (PSIG) STAINLESS STEEL
			(L)				
2-CPHLN_*	1/8	11	2"	3"	4"	5"	10000
4-CPHLN_*	1/4	14.28					8000
6-CPHLN_*	3/8	17.26					7500
8-CPHLN_*	1/2	22					8000
12-CPHLN_*	3/4	27	3"	4"	5"	6"	7500
16-CPHRN_*	1	36					5200

Adapter__NPT(F) x NPT(M)



PRODUCTION CODE	PIPE SIZE NPT (F) Inch. (ØN)	PIPE SIZE NPT (M) Inch. N1	HEX. SIZE	LENGTH	WORKING PRESSURE (PSIG) STAINLESS STEEL
			MM (F)	MM (L)	
2-CPA	1/8	1/8	14.28	22	6500
4-CPA	1/4	1/4	19	33	6000
6-CPA	3/8	3/8	22	33	5200
8-CPA	1/2	1/2	27	48	4900
12-CPA	3/4	3/4	36	48	5600
16-CPA	1	1	41.3	60.5	4300



Adapter__BSP(F) x BSP(M)



RS parallel threads are commonly used with flat RP gasket, please refer page no.11

PRODUCTION CODE	PIPE SIZE BSP (F) Inch. (ØN)	PIPE SIZE BSP (M) Inch. N1	HEX. SIZE	LENGTH	WORKING PRESSURE (PSIG) STAINLESS STEEL
			MM (F)	MM (L)	
4IP-CPA-4RS	1/8	1/8	19	31	4500
6IP-CPA-6RS	1/4	1/4	22	31	4500
8IP-CPA-8RS	3/8	3/8	27	39	3625
12IP-CPA-12RS	1/2	1/2	36	42	3625
16IP-CPA-16RS	3/4	3/4	41.3	50	3625



Reducing Adapter__NPT(F) x NPT(M)



PRODUCTION CODE	PIPE SIZE NPT (M) Inch. (ØN)	PIPE SIZE NPT (M) Inch. N1	HEX. SIZE	LENGTH	WORKING PRESSURE (PSIG) STAINLESS STEEL
			MM (F)	MM (L)	
4-CPRA-2	1/4	1/8	19	30	6000
6-CPRA-4	3/8	1/4	22	35	5200
8-CPRA-4	1/2	1/4	27	42	4900
8-CPRA-6		3/8	27	40.5	4900
12-CPRA-6	3/4	3/8	36	47	5600
12-CPRA-8		1/2	36	48.5	5600
16-CPRA-8		1/2	41.3	57	4300
16-CPRA-12	1	3/4	41.3	56	4300




Reducing Bushing__NPT(M) x NPT(F)




PRODUCTION CODE	PIPE SIZE NPT (M) Inch. (ØN)	PIPE SIZE NPT (F) N1 Inch.	HEX. SIZE	LENGTH	WORKING PRESSURE (PSIG) STAINLESS STEEL
			MM (F)	MM (L)	
4-CPRB-2	1/4	1/8	14.28	27	6000
6-CPRB-4	3/8	1/4	19	31	5200
8-CPRB-4	1/2	1/4	22	33	4900
8-CPRB-6		3/8	22	36.5	4900
12-CPRB-6	3/4	3/8	27	28	5600
12-CPRB-8		1/2	27	42	5600
16-CPRB-8	1	1/2	36	36	4300
16-CPRB-12		3/4	36	47	4300

Hex Coupling__NPT(F) x NPT(F)



PRODUCTION CODE	PIPE SIZE NPT (F) Inch. (ØN)	HEX. SIZE	LENGTH	WORKING PRESSURE (PSIG) STAINLESS STEEL
		MM (F)	MM (L)	
2-CPHC	1/8	14.28	20.6	6500
4-CPHC	1/4	19	30	6000
6-CPHC	3/8	22	33	5200
8-CPHC	1/2	27	39	4900
12-CPHC	3/4	36	39	5600
16-CPHC	1	41.3	50.8	4300


Hex Reducing Coupling__NPT(F) x NPT(F)



PRODUCTION CODE	PIPE SIZE NPT (F) Inch. (ØN)	PIPE SIZE NPT (F) Inch. N1	HEX. SIZE	LENGTH	WORKING PRESSURE (PSIG) STAINLESS STEEL
			MM (F)	MM (L)	
4-CPHRC-2	1/4	1/8	19	24	6000
6-CPHRC-4	3/8	1/4	22	28.4	5200
8-CPHRC-4	1/2	1/4	27	33.3	4900
8-CPHRC-6		3/8	27	33.3	4900
12-CPHRC-8	3/4	1/2	36	38.2	4900
16-CPHRC-8	1	1/2	41.3	43.1	4300
16-CPHRC-12		3/4	41.3	43.1	4300




Female Elbow__NPT(F) x NPT(F)

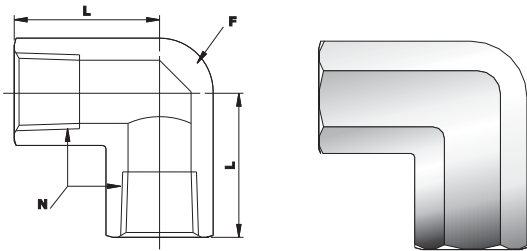


PRODUCTION CODE	PIPE SIZE NPT (F) Inch. (ØN)	HEX. SIZE	LENGTH	WORKING PRESSURE (PSIG) STAINLESS STEEL
		MM (F)	MM (L)	
2-CPFE	1/8	15	16.2	6500
4-CPFE	1/4	19	23.2	6000
6-CPFE	3/8	22	25	5200
8-CPFE	1/2	27	32.6	4900
12-CPFE	3/4	36	37.8	5600
16-CPFE	1	41.3	43.9	4300

Street Elbow__NPT(M) x NPT(F)

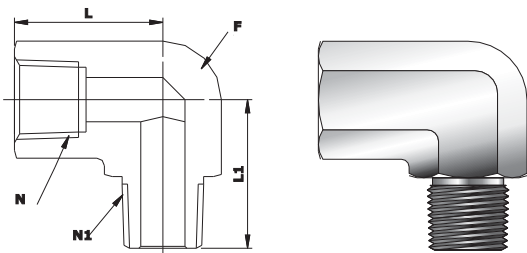

PRODUCTION CODE	PIPE SIZE NPT (F) Inch. (ØN)	PIPE SIZE NPT (M) N1 Inch.	HEX. SIZE	LENGTH		WORKING PRESSURE (PSIG) STAINLESS STEEL
			MM (F)	MM (L)	MM (L1)	
2-CPSE-2	1/8	1/8	15	16.2	20.2	6500
4-CPSE-4	1/4	1/4	19	23.2	27.2	6000
6-CPSE-6	3/8	3/8	22	25	29	5200
8-CPSE-8	1/2	1/2	27	32.6	36.7	4900
12-CPSE-12	3/4	3/4	36	37.8	41.9	5600
16-CPSE-16	1	1	41.3	43.9	49.9	4300


Reducing Street Elbow__NPT(M) x NPT(F)

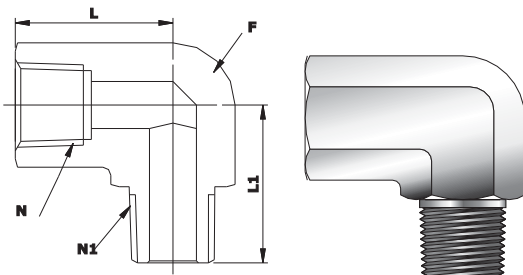

PRODUCTION CODE	PIPE SIZE NPT (F) Inch. (ØN)	PIPE SIZE NPT (M) Inch. N1	HEX. SIZE	LENGTH		WORKING PRESSURE (PSIG) STAINLESS STEEL
			MM (F)	MM (L)	MM (L1)	
4-CPSE-2	1/4	1/8	15	16.2	20.2	6000
6-CPSE-4	3/8	1/4	22	25	29	5200
8-CPSE-4	1/2	1/4	27	27.8	31.8	4900
8-CPSE-6		3/8	27	32.6	31.8	4900
12-CPSE-4	3/4	1/4	36	37.8	37	5600
12-CPSE-8		1/2	36	40.8	41.9	5600
16-CPSE-8	1	1/2	41.3	43.9	45	4300
16-CPSE-12		3/4	41.3	43.9	45	4300




Male Elbow__NPT(M) x NPT(M)

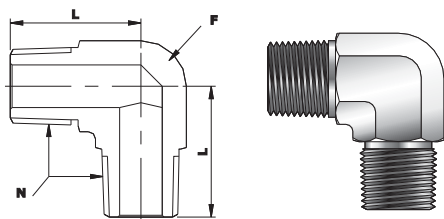


PRODUCTION CODE	PIPE SIZE NPT (M) Inch. (ØN)	HEX. SIZE	LENGTH	WORKING PRESSURE (PSIG) STAINLESS STEEL
		MM (F)	MM (L)	
2-CPME	1/8	12.5	18.8	10000
4-CPME	1/4	15	24.9	8000
6-CPME	3/8	19	27.2	7500
8-CPME	1/2	22	33.9	8000
12-CPME	3/4	27	36.7	7500
16-CPME	1	36	46.8	5200

45° Female Elbow__NPT(F) x NPT(F)

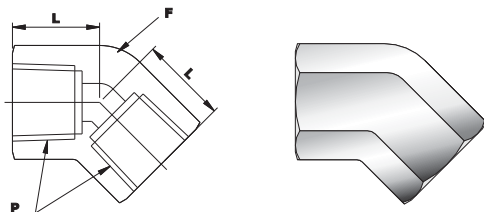


COMFIT PRODUCT CODE	NPT Female (P)	LENGTH (L)	HEX (F)	WORKING PRESSURE (PSIG) STAINLESS STEEL
	(Inch)			
1-CP45FE	1/16	0.47	7/16	7000
2-CP45FE	1/8	0.47	9/16	5500
4-CP45FE	1/4	0.69	3/4	5600
6-CP45FE	3/8	0.75	7/8	5000
8-CP45FE	1/2	0.94	1-1/16	4500
12-CP45FE	3/4	1.00	1-5/16	3500
16-CP45FE	1	1.19	1-5/8	3900

45° Street Elbow__NPT(M) x NPT(F)

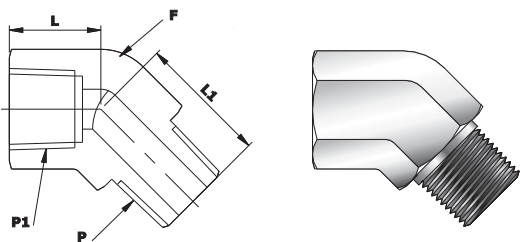


COMFIT PRODUCT CODE	NPT Male (P)	NPT Female (P1)	LENGTH (L)	LENGTH (L1)	HEX (F)	WORKING PRESSURE (PSIG) STAINLESS STEEL
	(Inch)					
1-CP45SE-1	1/16	1/16	0.47	0.66	7/16	7000
2-CP45SE-2	1/8	1/8	0.47	0.72	9/16	5500
4-CP45SE-4	1/4	1/4	0.63	1.05	3/4	5600
6-CP45SE-6	3/8	3/8	0.72	1.06	7/8	5000
8-CP45SE-8	1/2	1/2	0.91	1.34	1-1/16	4500
12-CP45SE-12	3/4	3/4	0.97	1.38	1-5/16	3500
16-CP45SE-16	1	1	1.13	1.72	1-5/8	3900

Female Tee__NPT(F) x NPT(F) x NPT(F)

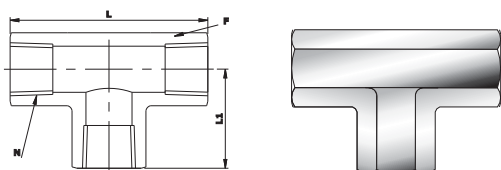


PRODUCTION CODE	PIPE SIZE NPT (F) Inch. (ØN)	HEX. SIZE	LENGTH		WORKING PRESSURE (PSIG) STAINLESS STEEL
		MM (F)	MM (L)	MM (L1)	
2-CPFT	1/8	15	32.4	16.2	6500
4-CPFT	1/4	19	46.4	23.2	6000
6-CPFT	3/8	22	49.9	25	5200
8-CPFT	1/2	27	65.2	32.6	4900
12-CPFT	3/4	36	75.6	37.8	5600
16-CPFT	1	41.3	87.8	43.9	4300

Street Tee__NPT(F) xNPT(M) x NPT(F)

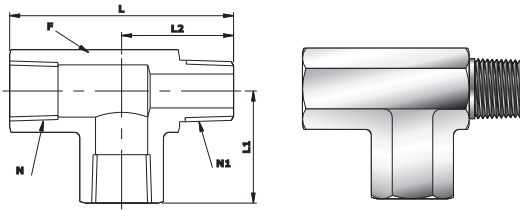


PRODUCTION CODE	PIPE SIZE NPT (F) Inch. (ØN)	PIPE SIZE NPT (M) N1 Inch.	HEX. SIZE MM (F)	LENGTH			WORKING PRESSURE (PSIG) STAINLESS STEEL
				MM (L)	MM (L1)	MM (L2)	
2-CPST-2	1/8	1/8	15	36.4	20.2	18.2	6500
4-CPST-4	1/4	1/4	19	50.4	27.2	25.2	6000
6-CPST-6	3/8	3/8	22	53.9	29	27	5200
8-CPST-8	1/2	1/2	27	69.3	36.7	24.7	4900
12-CPST-12	3/4	3/4	36	79.7	41.9	39.9	5600
16-CPST-16	1	1	41.3	93.8	49.9	46.9	4300

Branch Tee__NPT(F) x NPT(F) x NPT(M)

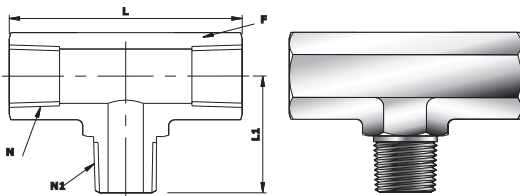


PRODUCTION CODE	PIPE SIZE NPT (F) Inch. (ØN)	PIPE SIZE NPT (M) N1 Inch.	HEX. SIZE MM (F)	LENGTH			WORKING PRESSURE (PSIG) STAINLESS STEEL
				MM (L)	MM (L1)	MM (L2)	
2-CPBT-2	1/8	1/8	15	32.4	20.2	6500	
4-CPBT-4	1/4	1/4	19	46.4	27.2	6000	
6-CPBT-6	3/8	3/8	22	49.9	29	5200	
8-CPBT-8	1/2	1/2	27	65.2	36.7	4900	
12-CPBT-12	3/4	3/4	36	75.6	41.9	5600	
16-CPBT-16	1	1	41.3	87.8	49.9	4300	

Male Tee__NPT(M) x NPT(M) x NPT(M)

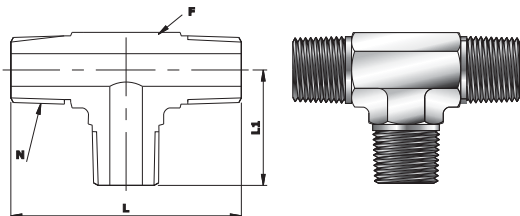

PRODUCTION CODE	PIPE SIZE NPT (M) Inch. (ØN)	HEX. SIZE MM (F)	LENGTH			WORKING PRESSURE (PSIG) STAINLESS STEEL
			MM (L)	MM (L1)	MM (L2)	
2-CPMT	1/8	12.5	37.5	18.8	10000	
4-CPMT	1/4	15	49.8	24.9	8000	
6-CPMT	3/8	19	54.4	27.2	7500	
8-CPMT	1/2	22	57.9	29	8000	
12-CPMT	3/4	27	63.6	31.8	7500	
16-CPMT	1	36	74	37	5200	


Female Cross__NPT(F) x 4 Sides

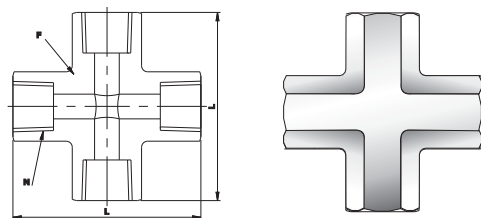

PRODUCTION CODE	PIPE SIZE NPT (F) Inch. (ØN)	HEX. SIZE MM (F)	LENGTH			WORKING PRESSURE (PSIG) STAINLESS STEEL
			MM (L)	MM (L1)	MM (L2)	
2-CPFC	1/8	15	32.4	32.4	6500	
4-CPFC	1/4	19	46.4	46.4	6000	
6-CPFC	3/8	22	49.9	49.9	5200	
8-CPFC	1/2	27	65.2	65.2	4900	
12-CPFC	3/4	36	75.6	75.6	5600	
16-CPFC	1	41.3	87.8	87.8	4300	




Hex Female Pipe Cap__NPT(F)

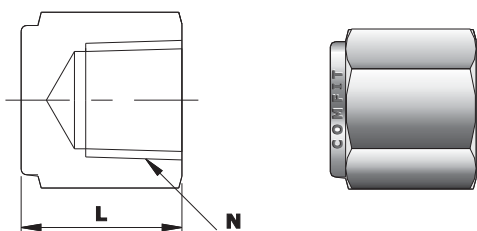


PRODUCTION CODE	PIPE SIZE NPT (F) Inch. (ØN)	HEX. SIZE	LENGTH	WORKING PRESSURE (PSIG) STAINLESS STEEL
		MM (F)	MM (L)	
2-CPHFPC	1/8	14.28	17	6500
4-CPHFPC	1/4	19	23	6000
6-CPHFPC	3/8	22	25.5	5200
8-CPHFPC	1/2	27	32	4900
12-CPHFPC	3/4	36	37	5600
16-CPHFPC	1	41.3	43	4300

Hex Male Plug__NPT(M)

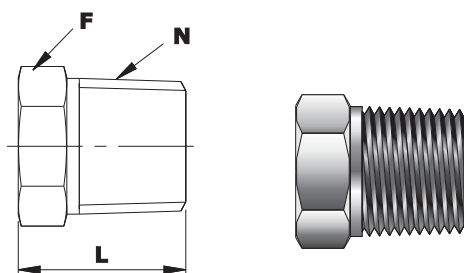

PRODUCTION CODE	PIPE SIZE NPT (F) Inch. (ØN)	HEX. SIZE	LENGTH
		MM (F)	MM (L)
2-CPHMP	1/8	14.28	15.5
4-CPHMP	1/4	19	18
6-CPHMP	3/8	22	20.2
8-CPHMP	1/2	27	22
12-CPHMP	3/4	36	26
16-CPHMP	1	41.3	29

Hex Male Plug__BSPP(M)

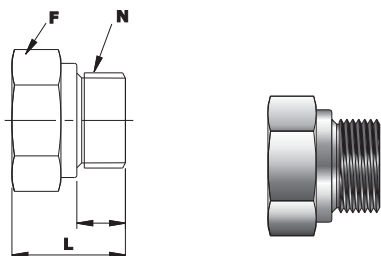


PRODUCTION CODE	PIPE SIZE NPT (F) Inch. (ØN)	HEX. SIZE	LENGTH	WORKING PRESSURE (PSIG) STAINLESS STEEL
		MM (F)	MM (L)	
2RS-CPHMP	1/8	14.28	15.5	4500
4RS-CPHMP	1/4	19	18.5	4500
6RS-CPHMP	3/8	22	19.5	4500
8RS-CPHMP	1/2	27	23	3625
12RS-CPHMP	3/4	36	25	3625
16RS-CPHMP	1	41.3	30	3625

1) RS parallel threads are commonly used with flat RP gasket, please refer page no. 11




Gasket_RS

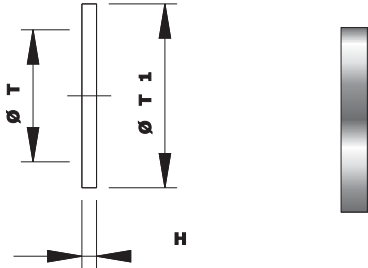

COMFIT PRODUCT CODE	(ØT)		(H)		(ØT1)	
	(mm)	(Inch.)	(mm)	(Inch.)	(mm)	(Inch.)
(Dimensions in Millimeters & Inches)						
2-CPRSG	10.4	0.41	2.0	0.08	16.0	0.63
4-CPRSG	13.7	0.54	2.0	0.08	20.6	0.81
6-CPRSG	17.3	0.68	2.0	0.08	23.9	0.94
8-CPRSG	21.6	0.85	2.5	0.10	28.7	1.12
12-CPRSG	27.2	1.06	2.5	0.10	35.1	1.38
16-CPRSG	33.8	1.33	2.5	0.10	42.9	1.69

It's consists of a Buna-N inner ring bonded to a carbon steel outer ring. (Viton inner ring bonded to a stainless steel outer ring is available on special order) used to seal a male BSP(ISO) Parallel Threads.


Gasket_RP

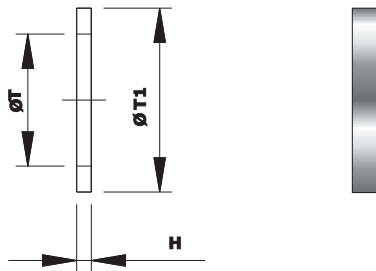

COMFIT PRODUCT CODE	(ØT)		(H)		(ØT1)	
	(mm)	(Inch.)	(mm)	(Inch.)	(mm)	(Inch.)
2-CPRPG	9.9	0.39	1.0	0.04	15.0	0.59
4-CPRPG	13.5	0.52	1.5	0.06	18.8	0.75
6-CPRPG	17.0	0.66	1.5	0.06	22.9	0.91
8-CPRPG	21.3	0.83	1.5	0.06	27.0	1.06
12-CPRPG	26.7	1.05	2.0	0.08	33.0	1.30
16-CPRPG	33.5	1.31	2.0	0.08	40.6	1.58


It's consists of a copper Gasket used to seal a male BSP(ISO) Parallel Threads.

Gasket_RG

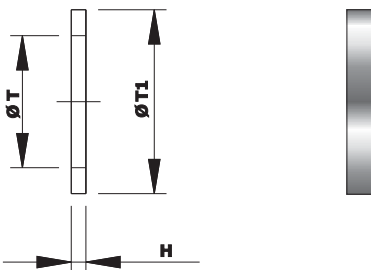

COMFIT PRODUCT CODE	(ØT)		(H)		(ØT1)	
	(mm)	(Inch.)	(mm)	(Inch.)	(mm)	(Inch.)
(Dimensions in Millimeters & Inches)						
4-CPRGG	7.6	0.30	1.8	0.07	10.7	0.42
6-CPRGG	8.6	0.34	2.3	0.09	14.2	0.56
8-CPRGG	9.1	0.36	2.5	0.10	17.8	0.70

It's consists of a copper Gasket used to seal a male BSP (ISO) Parallel Threads.

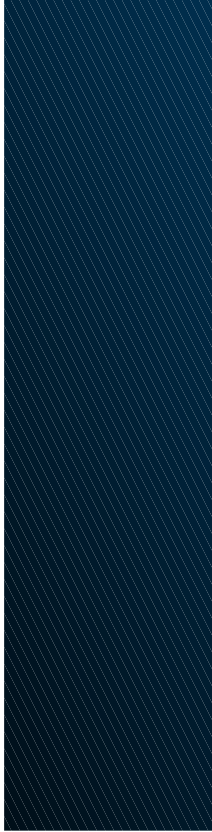

AN ISO 9001 : 2015, ISO 14001 : 2015, ISO 45001 : 2018 & PED Certified Company

REGD. & SALES OFFICE / WORKS

Survey No. 23/1, Part -2, Laxmipura - Nandasan,
Ahmedabad - Mehsana Highway, Post : Nandasan - 382705.
Tal. Kadi, Dist. Mehsana, Gujarat (INDIA)

Phone : +91 2764 267036 | Fax : +91 2764 267037
E-mail : info@com-fit.com, marketing@com-fit.com

www.com-fit.com

